


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

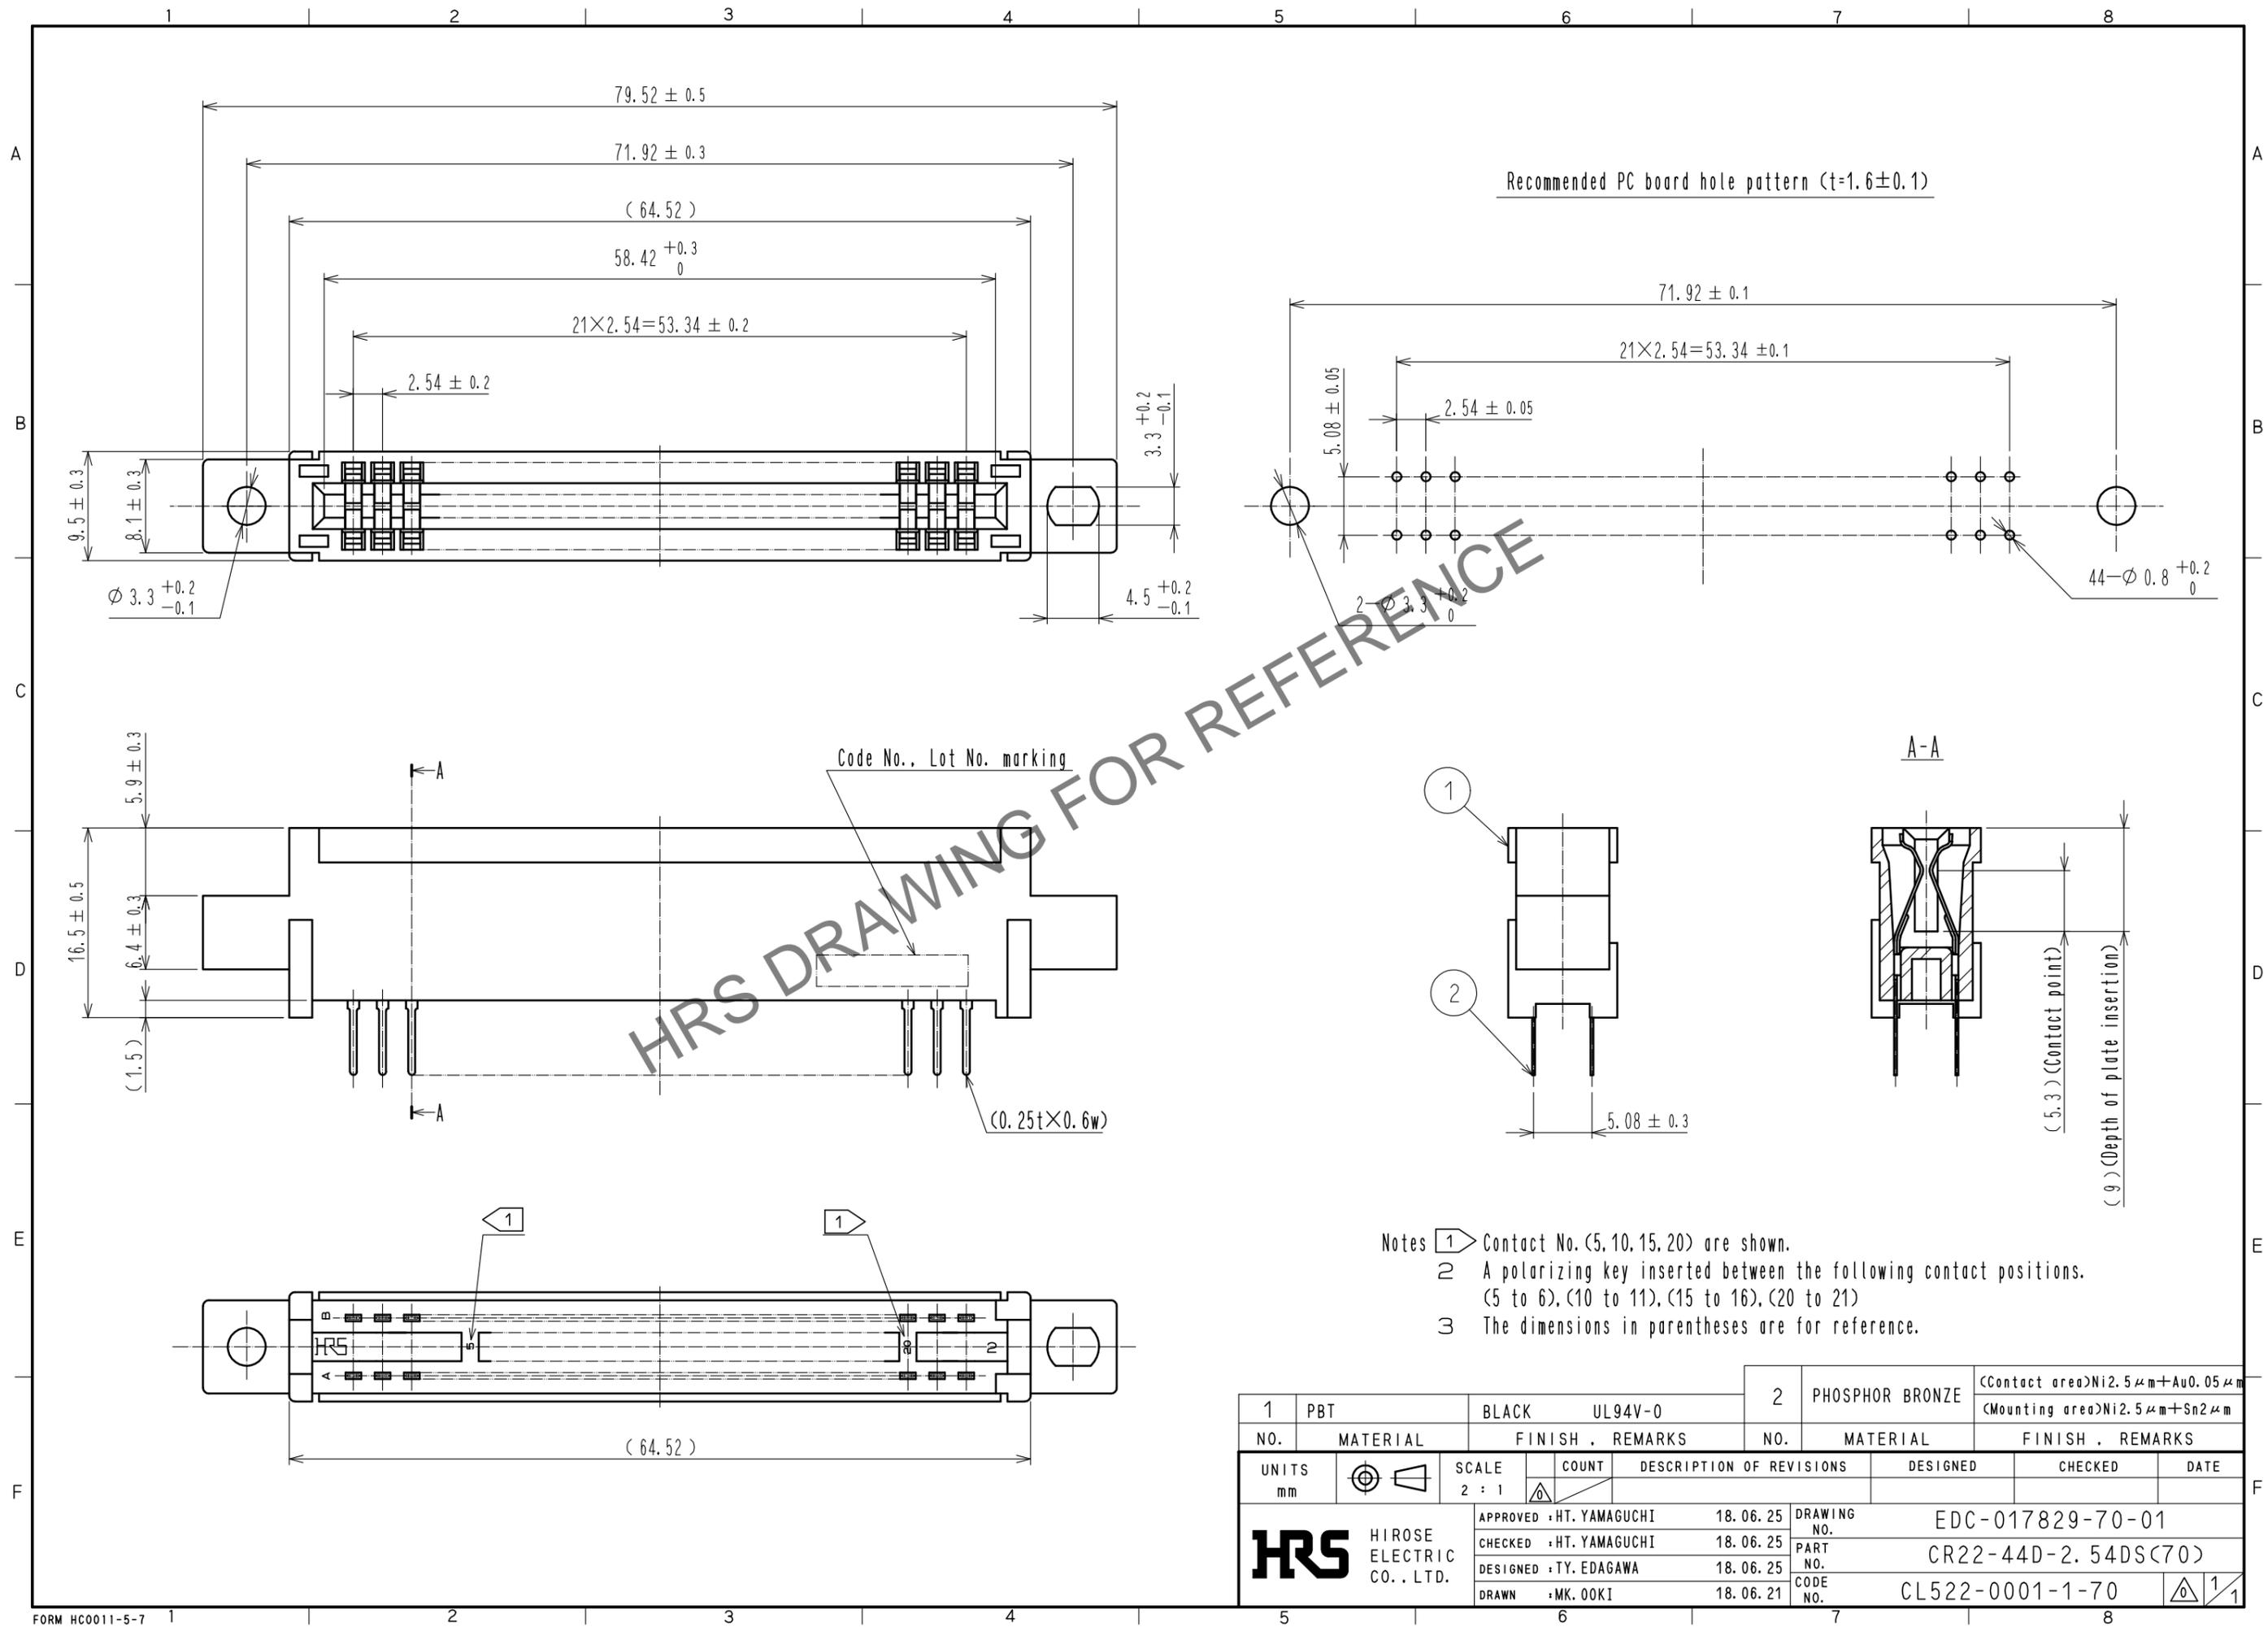

HRS DRAWING FOR REFERENCE

- Notes
- 1 Contact No. (5, 10, 15, 20) are shown.
 - 2 A polarizing key inserted between the following contact positions. (5 to 6), (10 to 11), (15 to 16), (20 to 21)
 - 3 The dimensions in parentheses are for reference.

1	PBT	BLACK	UL94V-0	2	PHOSPHOR BRONZE	(Contact area)Ni2.5μm+Au0.05μm (Mounting area)Ni2.5μm+Sn2μm
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS		SCALE	COUNT	DESCRIPTION OF REVISIONS		
mm		2 : 1		DESIGNED	CHECKED	DATE
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : HT. YAMAGUCHI	18.06.25	DRAWING NO. EDC-017829-70-01		
		CHECKED : HT. YAMAGUCHI	18.06.25	PART NO. CR22-44D-2.54DS(70)		
		DESIGNED : TY. EDAGAWA	18.06.25	CODE NO. CL522-0001-1-70		
		DRAWN : MK. OOKI	18.06.21			