

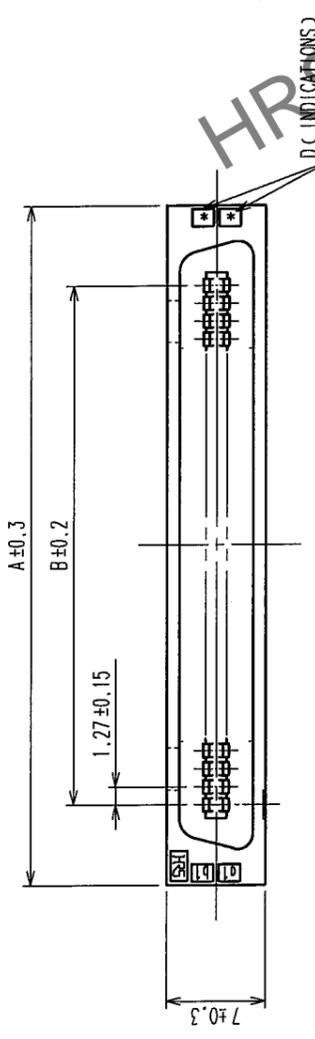


2 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					△				
△					△				
△					△				


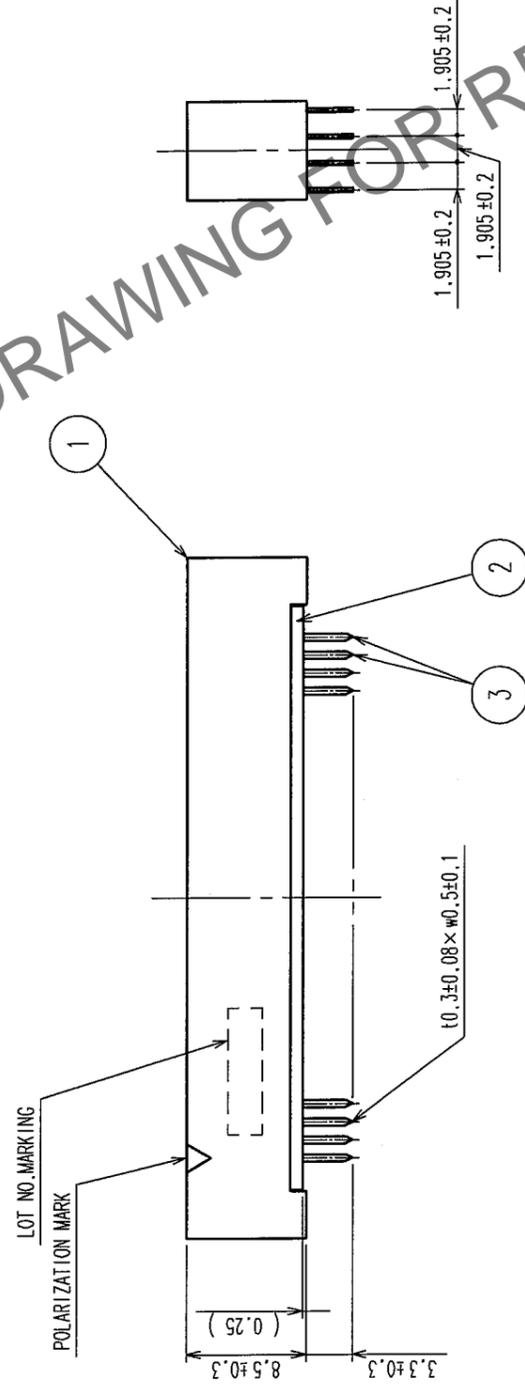


RECOMMEND PC BOARD HOLE PATTERN (MOUNTING SIDE)
t=1.6

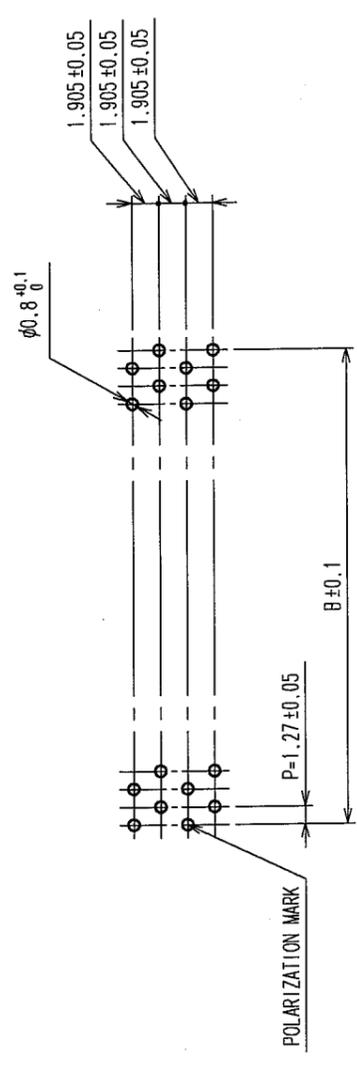

PART No.	CODE No.	2	A	B	C	D
FX2CA-20P-1.27DSA(71)	CL572-2301-2-71	20	22.75	11.43	19.05	10
FX2CA-32P-1.27DSA(71)	CL572-2302-5-71	32	30.37	19.05	26.67	16
FX2CA-40P-1.27DSA(71)	CL572-2303-8-71	40	35.45	24.13	31.75	20
FX2CA-52P-1.27DSA(71)	CL572-2304-0-71	52	43.07	31.75	39.37	26
FX2CA-60P-1.27DSA(71)	CL572-2305-3-71	60	48.15	36.83	44.45	30
FX2CA-68P-1.27DSA(71)	CL572-2306-6-71	68	53.23	41.91	49.53	34
FX2CA-80P-1.27DSA(71)	CL572-2307-9-71	80	60.85	49.53	57.15	40
FX2CA-100P-1.27DSA(71)	CL572-2308-1-71	100	73.55	62.23	69.85	50
FX2CA-120P-1.27DSA(71)	CL572-2309-4-71	120	86.25	74.93	82.55	60

NOTES 1. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
2. NUMBER OF PIN.

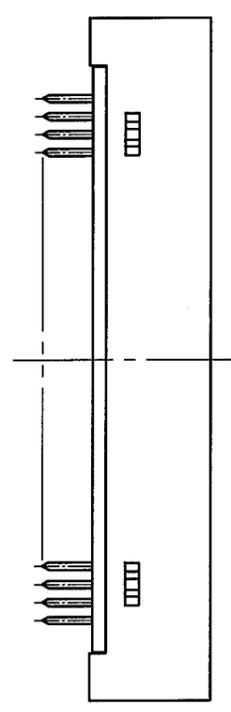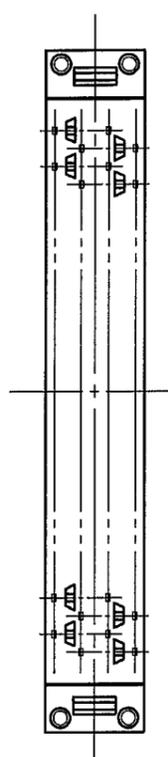

2	POLYAMIDE	BLACK	UL94V-0	3	PHOSPHOR BRONZE	CONTACT AREA: GOLD 0.2μm min
1	POLYAMIDE	BLACK	UL94V-0			DIP AREA: TIN-PLATING 2μm min
						UNDER PLATING: NICKEL 2μm min
NO. MATERIAL		FINISH, REMARKS		NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD)		DRAWN		DESIGNED	CHECKED	APPROVED
CL		I. OKAYAMA		K. NAKAMURA	H. OKAWA	H. OKAWA
		04.06.02		04.06.02	04.06.09	04.06.09
SCALE		DRAWING NO.		PART NO.		
FREE		EDC3-083051-21		FX2CA-**P-1.27DSA(71)		
UNITS		mm		CODE NO.		
		HIROSE ELECTRIC CO., LTD		CL572		

TO
PCK