


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

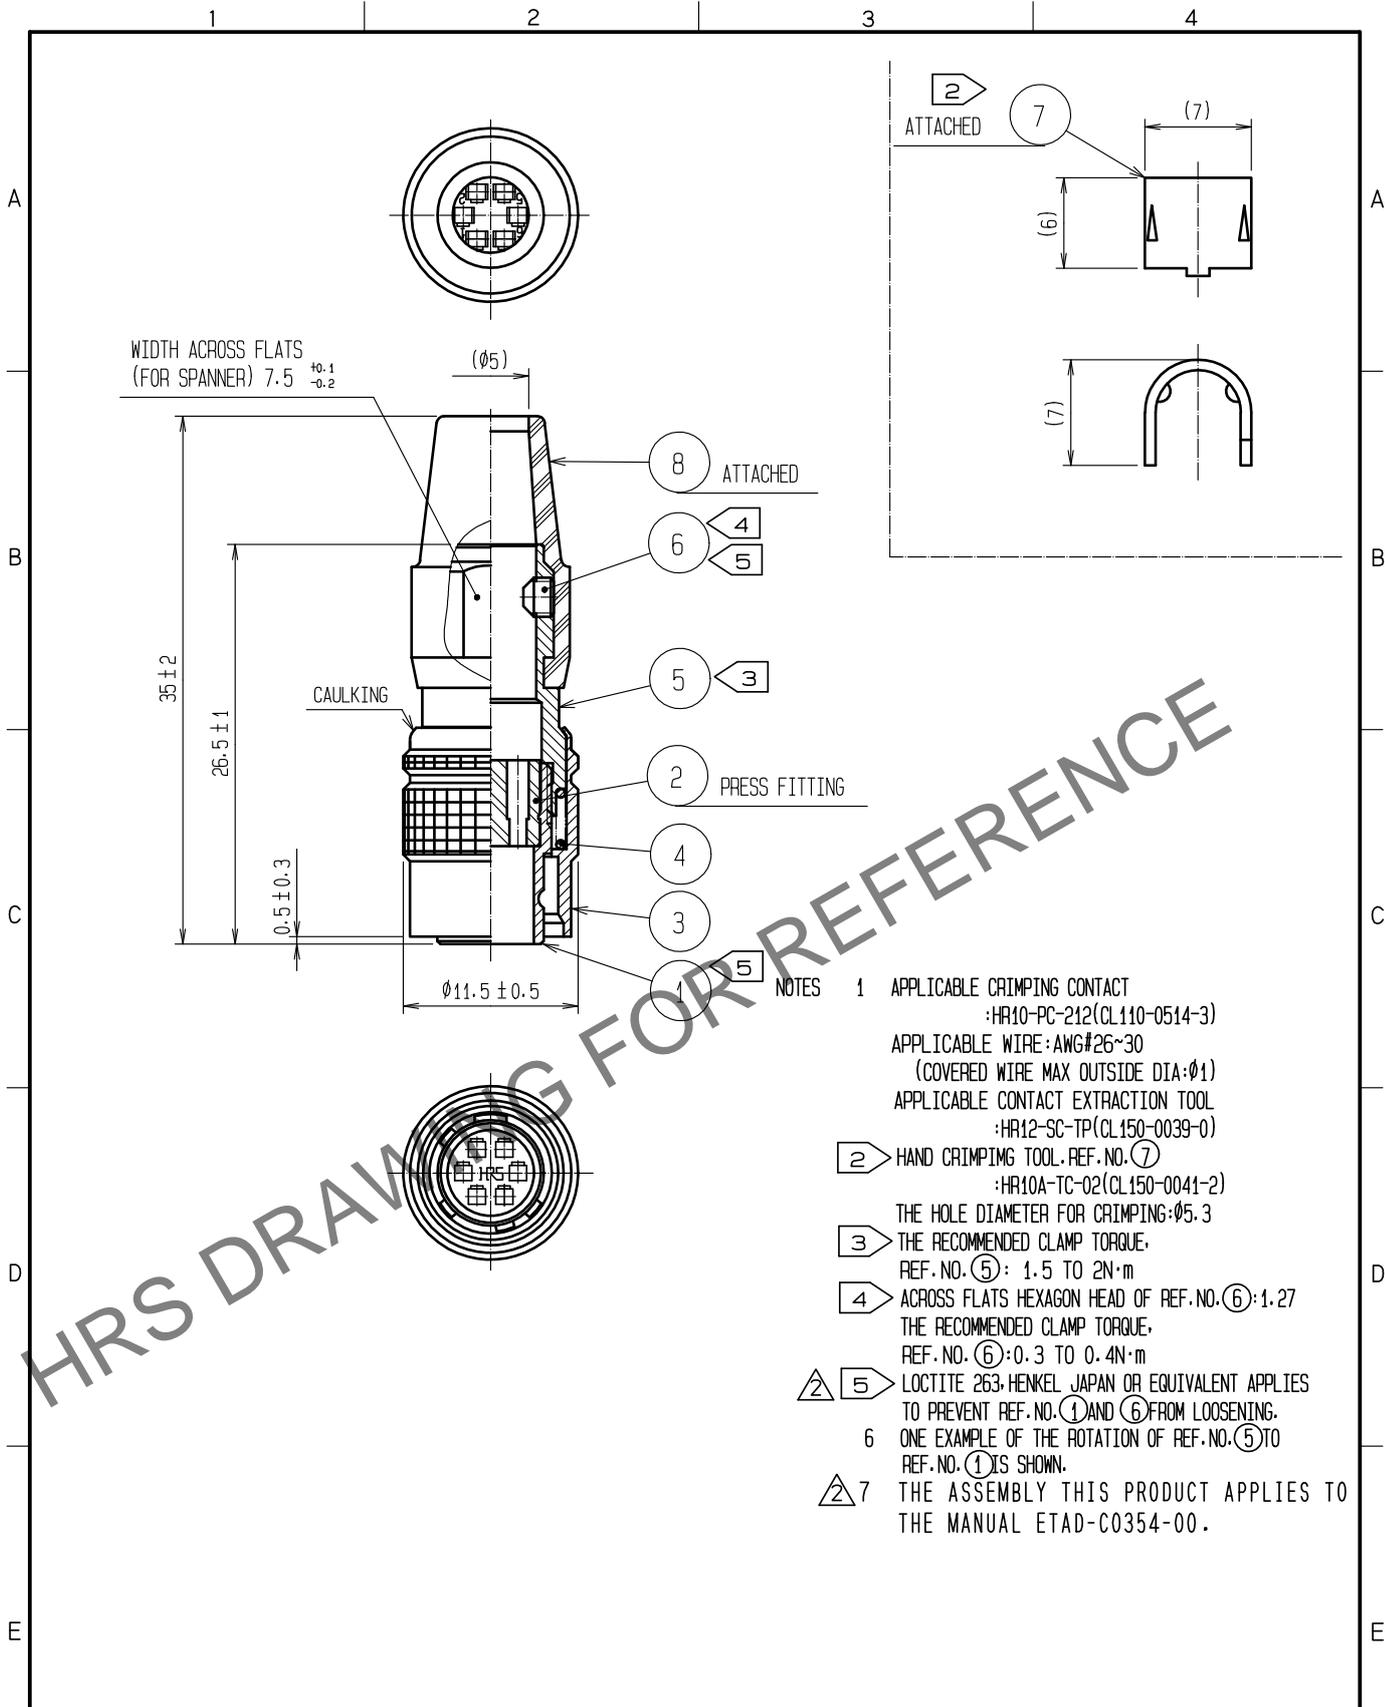

- NOTES
- 1 APPLICABLE CRIMPING CONTACT :HR10-PC-212(CL110-0514-3)
 APPLICABLE WIRE:AWG#26~30
 (COVERED WIRE MAX OUTSIDE DIA:φ1)
 APPLICABLE CONTACT EXTRACTION TOOL :HR12-SC-TP(CL150-0039-0)
 - 2 HAND CRIMPING TOOL.REF.NO.⑦ :HR10A-TC-02(CL150-0041-2)
 THE HOLE DIAMETER FOR CRIMPING:φ5.3
 - 3 THE RECOMMENDED CLAMP TORQUE. REF.NO.⑤: 1.5 TO 2N·m
 - 4 ACROSS FLATS HEXAGON HEAD OF REF.NO.⑥:1.27
 THE RECOMMENDED CLAMP TORQUE. REF.NO.⑥:0.3 TO 0.4N·m
 - 5 LOCTITE 263:HENKEL JAPAN OR EQUIVALENT APPLIES TO PREVENT REF.NO.①AND ⑥FROM LOOSENING.
 ONE EXAMPLE OF THE ROTATION OF REF.NO.⑤TO REF.NO.①IS SHOWN.
 - 6 THE ASSEMBLY THIS PRODUCT APPLIES TO THE MANUAL ETAD-C0354-00.

4	STEEL	NICKEL PLATING	8	CHLOROPRENE RUBBER	(BLACK)
3	BRASS	MATTE FINISH NICKEL PLATED	7	BRASS	
2	POLYBUTYLENE TEREPHTHALATE	(BLACK) UL94V-0	6	STEEL	NICKEL PLATING HEXAGON SOCKET SET SCREW M2.6X0.45X2
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	5	BRASS	NICKEL PLATING
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS

UNITS mm		SCALE 2 : 1	COUNT ② 2	DESCRIPTION OF REVISIONS DIS-C-00017346	DESIGNED HT. ZENBA	CHECKED HY. KOBAYASHI	DATE 20240508
HRS HIROSE ELECTRIC CO., LTD. APPROVED :MO. SATOH 20060530 CHECKED :EJ. KUNII 20060529 DESIGNED :DS. MATSUNE 20060526 DRAWN :MK. SATO 20060525				DRAWING NO. EDC4-021662-73 PART NO. HR10A-7P-6PC(73) CODE NO. CL0110-0503-7-73			