


Sep. 1. 2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

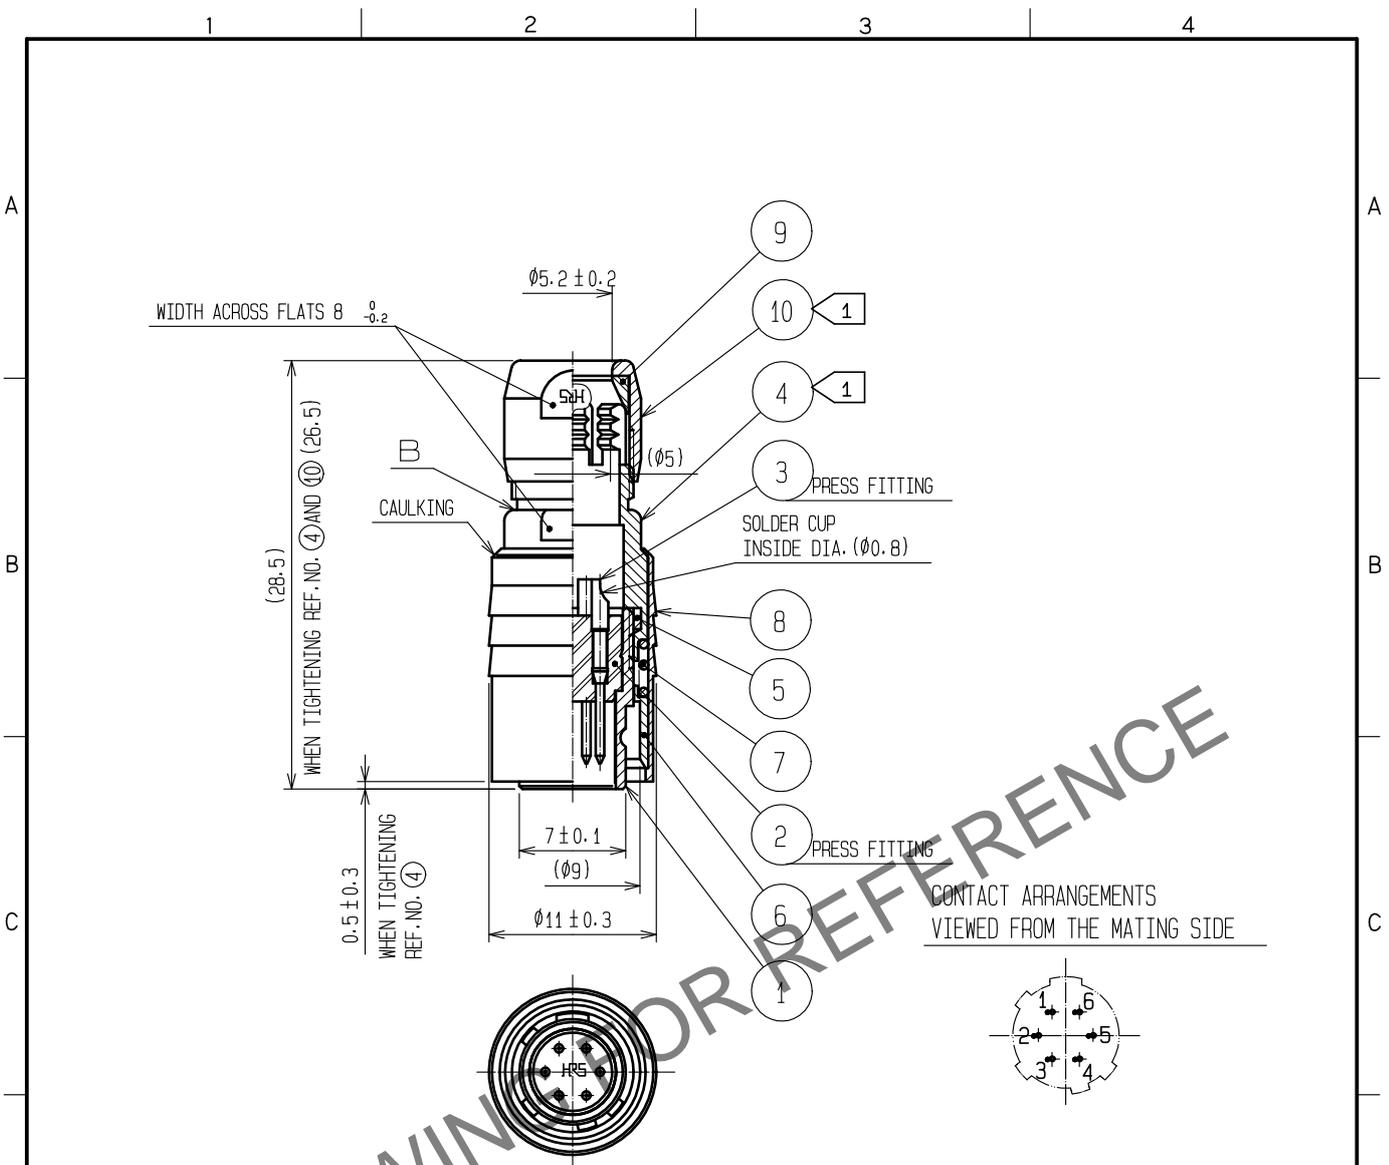

HRS DRAWING FOR REFERENCE

CONTACT ARRANGEMENTS  
VIEWED FROM THE MATING SIDE

- NOTES
- ① THE RECOMMENDED CLAMP TORQUE, REF. NO. ④ AND ⑩ : 1.5 N·m.
  - ① THREAD LOCKER TO THE THREADED PORTION OF REF. NO. ① APPLIES TO PREVENT REF. NO. ④ FROM LOOSING.  
RECOMMENDED THREAD LOCKER: LOCTITE 263, HENKEL JAPAN LTD.  
REF. NO. ⑩ SHALL BE TIGHTENED BY TORQUE AFTER CLAMPED UNTIL IT TOUCHES THE SURFACE B.
  - ② ONE EXAMPLE OF THE ROTATION OF REF. NO. ①, ④ AND ⑩ IS SHOWN.
  - ③ THE ASSEMBLY THIS PRODUCT APPLIES TO THE MANUAL ETAD-C0355-00.

5	POLYAMIDE		10	BRASS	MATTE FINISH NICKEL PLATING
4	BRASS	MATTE FINISH NICKEL PLATING	9	POLYAMIDE	
3	BRASS	GOLD PLATING 0.2µm min. NICKEL UNDER PLATING 2µm min.	8	BRASS	MATTE FINISH NICKEL PLATING
2	POLYAMIDE	(BLUE)	7	STEEL	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATING	6	STAINLESS STEEL	
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS

UNITS mm		SCALE 2 : 1	COUNT ① 2	DESCRIPTION OF REVISIONS DIS-C-00016940	DESIGNED HT. ZENBA	CHECKED EJ. KUNII	DATE 20240214
HIROSE ELECTRIC CO., LTD.				APPROVED : MR. YOSHIDA	20050105	DRAWING NO. EDC4-007758-73 PART NO. HR10-7P-6P(73) CODE NO. CL0110-0023-1-73	
				CHECKED : MO. SATOH	20050105		
				DESIGNED : YH. YAMADA	20050105		
				DRAWN : YH. YAMADA	20050105		
1/1							