


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

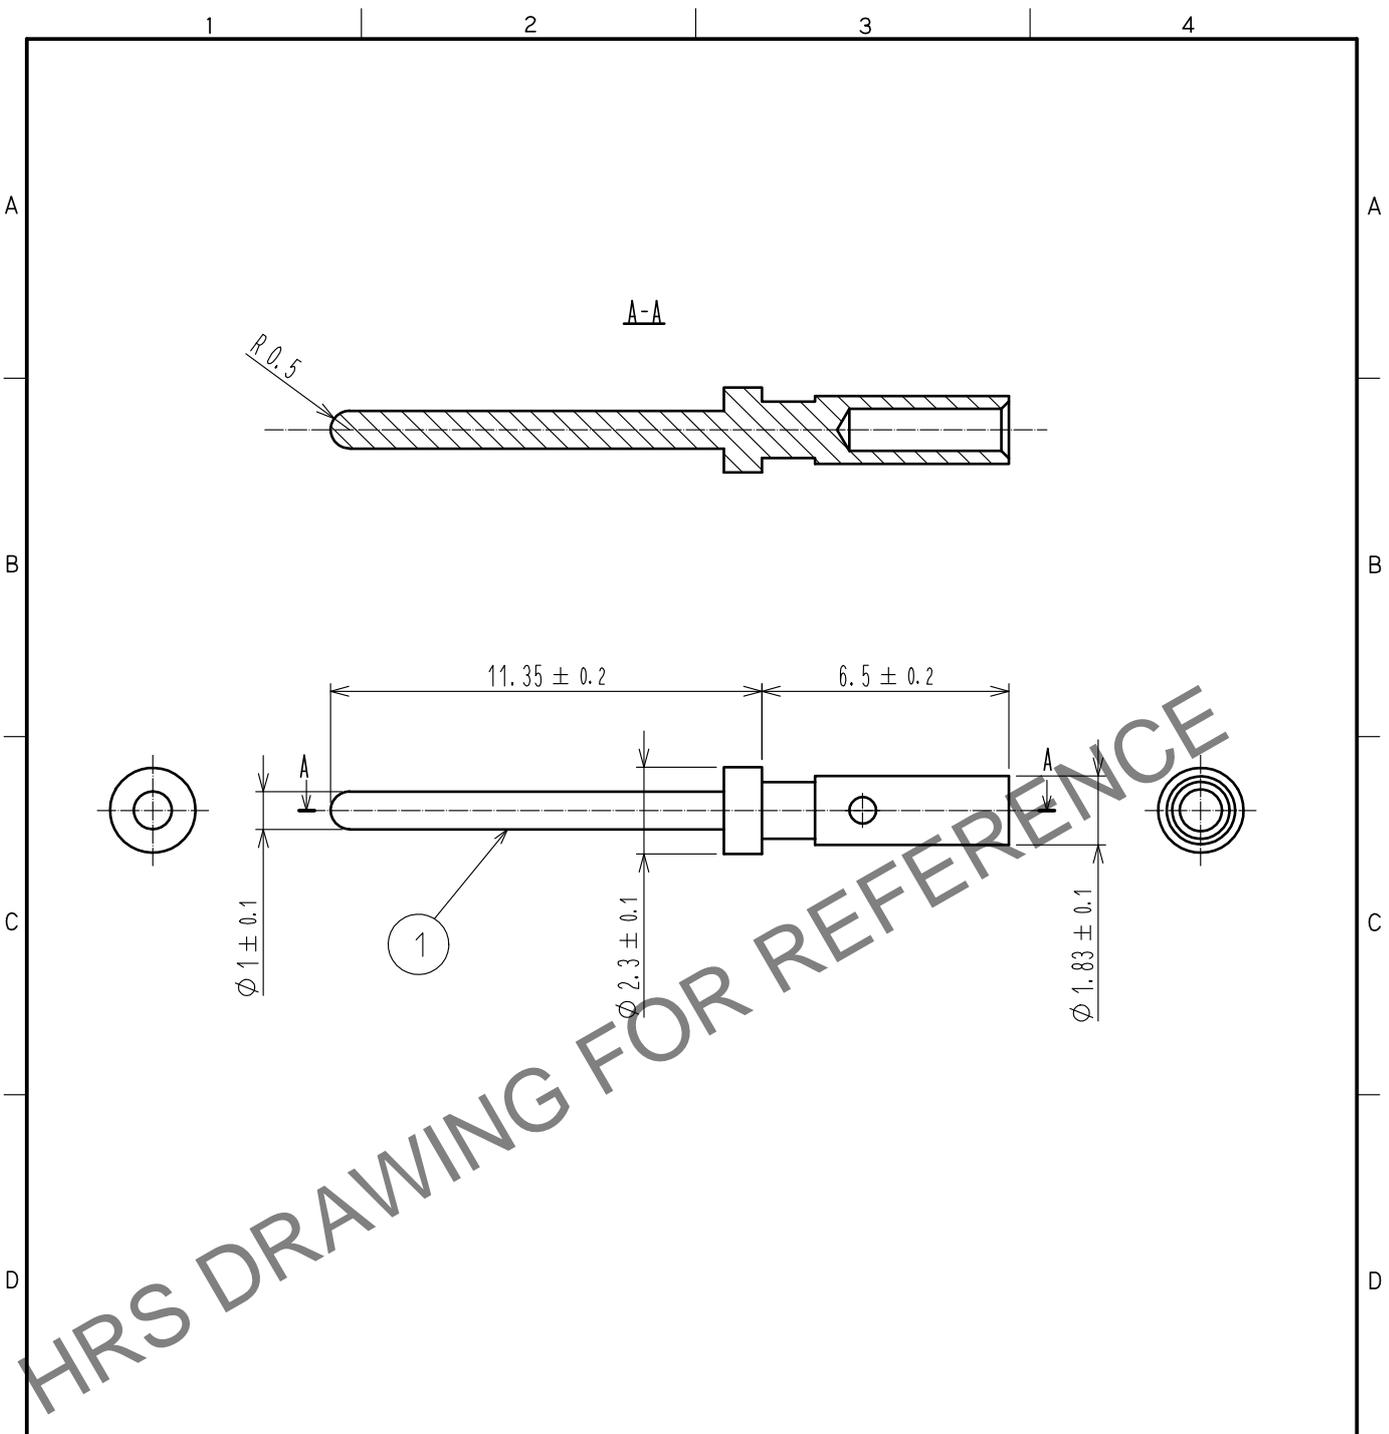

- Note
1. This product will be inserted into the TJ50L-4P-UNIT of the TJ*L series.
 2. This product is supplied in bags of 100 pcs each.
 3. Please crimp the applicable cable (AWG 22, 0.3 sq) with the crimping tool (MIL-C-22520/1-01). The locator which will be attached to the crimping tool is TJ50L/CRMD-22LCT (CL250-0040-8 00). For further details regarding the wiring and assembly procedure please refer to the ETAD-E3078 instruction manual.

1	Brass	Gold plating, contact area 0.76 μm min. crimping area 0.1 μm min.						
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS		
UNITS mm		SCALE 5 : 1	COUNT 	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
HIROSE ELECTRIC CO., LTD.		APPROVED	:RI. TAKAYASU	16.07.06	DRAWING NO. EDC4-128279-00			
		CHECKED	:AH. KODAMA	16.07.05	PART NO. TJ50L-22PCA			
		DESIGNED	:TA. TORIHARA	16.07.05	CODE NO. CL236-3215-0-00			
		DRAWN	:TA. TORIHARA	16.07.05	1/1			