

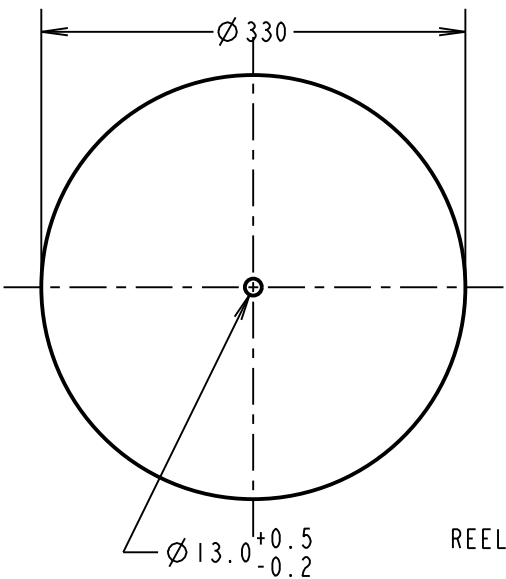
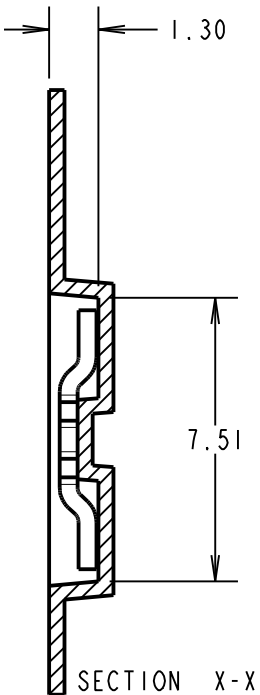


Customer Information Sheet


DRAWING No.: S1911-46R SHEET 2 OF 2 IF IN DOUBT - ASK © NOT TO SCALE THIRD ANGLE PROJECTION ALL DIMENSIONS IN mm

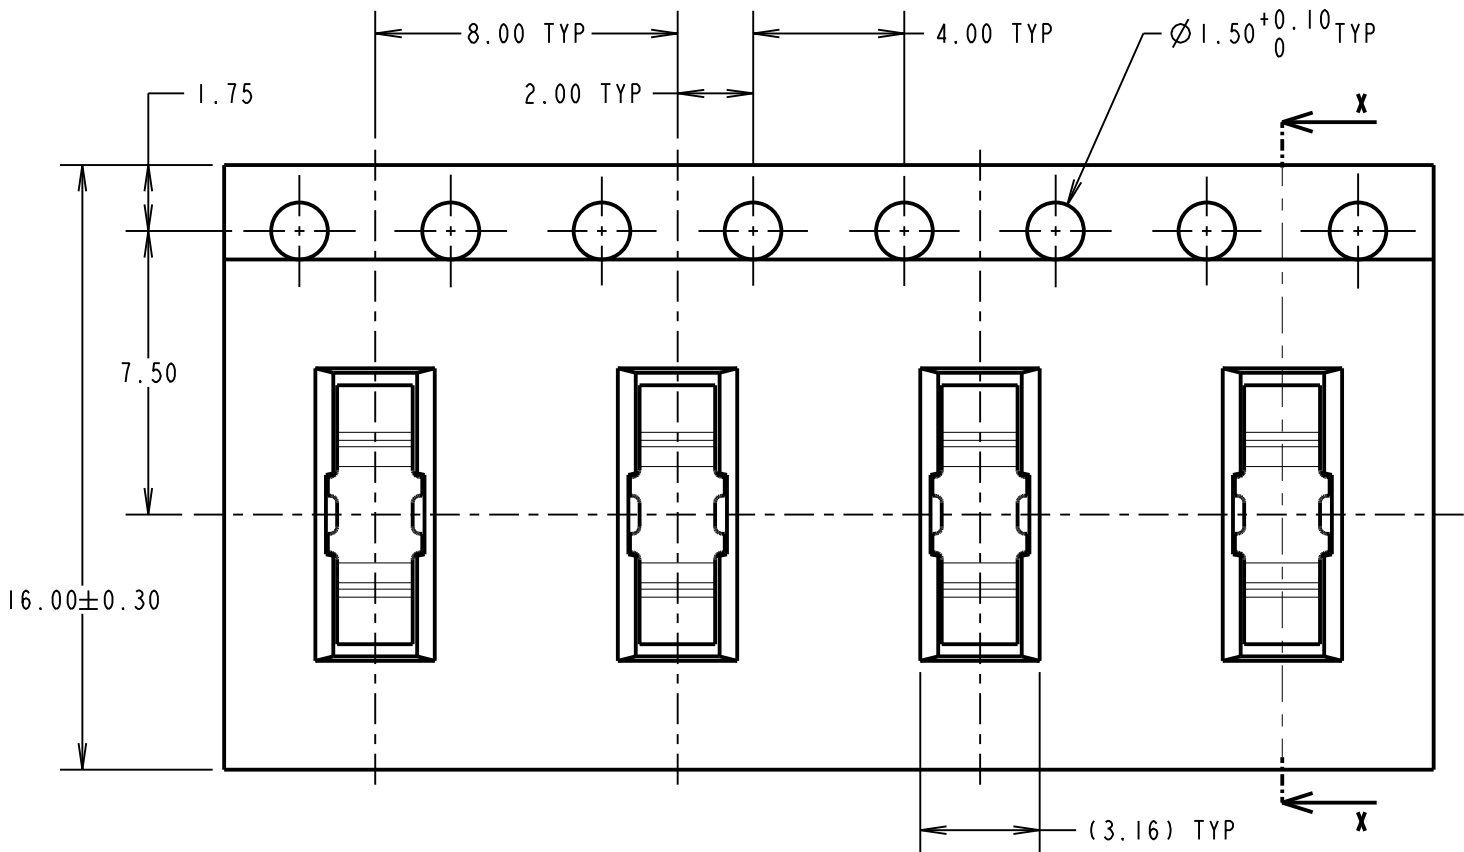

REEL DIMENSIONS

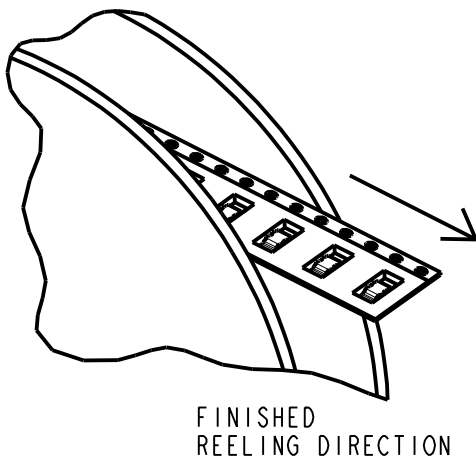


FINISHED REELING DIRECTION

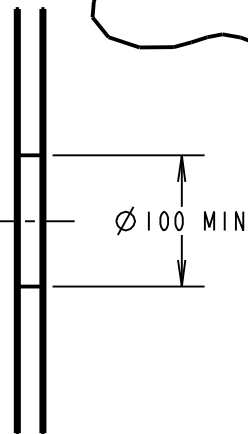


- NOTES:
- 1. QUANTITY OF COMPONENTS PER REEL = 4,000.
 - 2. THIS PRODUCT IS TAPED AND REELED IN GENERAL ACCORDANCE WITH EIA-481 (ELECTRONIC INDUSTRIES ASSOCIATION).


COMPONENT SPECIFICATION:
MATERIAL = BRASS CW508L
H110 TO BS EN 1652
COMPOSITION (IN ACCORDANCE WITH BS EN 1652)
FINISH = 100% TIN OVER NICKEL
ELECTRICAL:
CURRENT RATING = 10A (30°C TEMP RISE)
CONTACT RESISTANCE = 20mΩ MAX
ENVIRONMENTAL:
OPERATING TEMPERATURE = -40°C TO +125°C

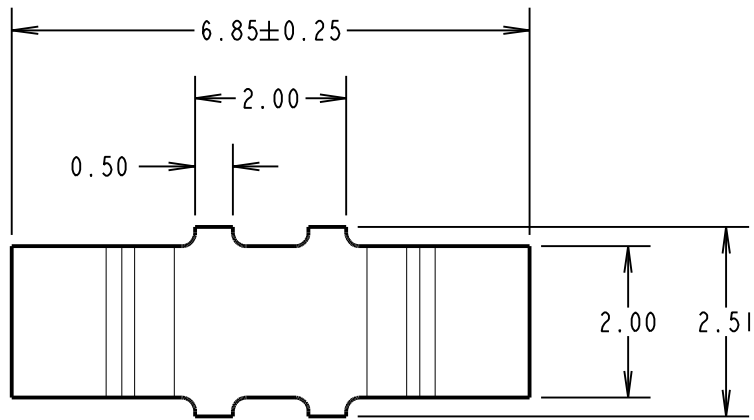


SINGLE COMPONENT DIMENSIONS



ISOMETRIC VIEW OF SINGLE COMPONENT

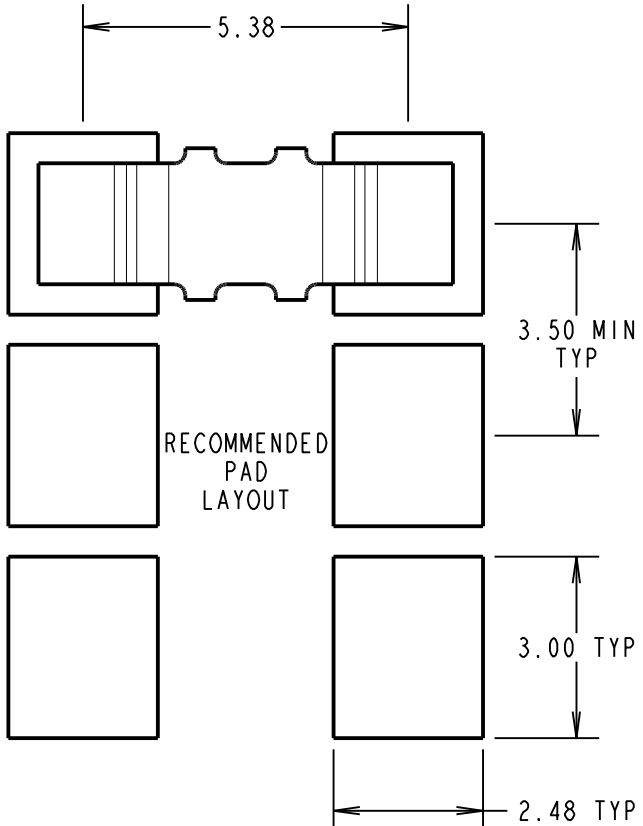

RECOMMENDED PAD LAYOUT

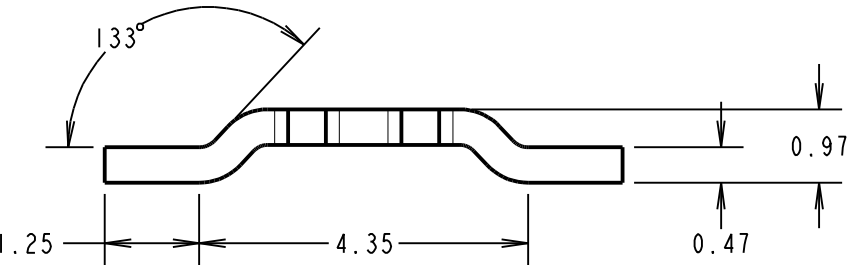

HARWIN
www.harwin.com
technical@harwin.com

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES
X. = ±1mm
X.X = ±0.50mm
X.XX = ±0.10mm
X.XXX = ±0.01mm
ANGLES = ±5°
UNLESS STATED

MATERIAL:
SEE ABOVE
FINISH: SEE ABOVE
S/AREA: SEE ABOVE mm²

TITLE:
SMT JUMPER LINK (TAPE AND REELED)
DRAWING NUMBER:
S1911-46R
SHT 2 OF 2

MSP	5	16.10.15	13113
NAME	ISS.	DATE	C/NOTE
APPROVED: M.PERREN			
CHECKED: S.BENNETT			
DRAWN: S.BENNETT			
CUSTOMER REF.:			
ASSEMBLY DRG:			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Harwin:

S1911-46R