

- Ultra wide 4:1 input voltage 15 W DC/DC converter in a 1.6 x 1 " plastic case
- I/O isolation 5000 VAC rated for 250 VAC working voltage
- Certification according to IEC/EN/ES 60601-1 3rd edition for 2 x MOPP
- Risk management process according to ISO 14971 incl. risk management file
- Acceptance criteria for electronic assemblies acc. to IPC-A-610 Level 3
- Low leakage current <2.5  $\mu$ A
- Operating temperature -40°C to 85°C
- EMC compliance to IEC 60601-1-2 4th edition and EN55032 class A
- Operating up to 5000m altitude
- 5-year product warranty



ES 60601-1 IEC 60601-1  
UL 62368-1 IEC 62368-1

The THM 15WI series is a range of medical 15 Watt DC/DC converters in 1.6" x 1.0" plastic package and with wide 2:1 input voltage range. They provide a reinforced isolation system for 5000 VAC isolation and a very low leakage current of less than 2.5  $\mu$ A. The units are approved to IEC/EN/ES 60601-1 3rd edition for 2 x MOPP and come along with an ISO 14971 risk management file. Design and production conform to the quality management system ISO 13485. With a high efficiency of up to 90% and highest grade components the converters can reliably operate in an ambient temperature range of -40°C up to +85°C. They constitute a reliable solution not only for medical equipment but also for demanding ranges of application such as transportation, control & measurement or IGBT drivers.

### Models

Order Code	Input Voltage Range	Output 1		Output 2		Efficiency typ.
		Vnom	I <sub>max</sub>	Vnom	I <sub>max</sub>	
THM 15-2411WI	9 - 36 VDC (24 VDC nom.)	5 VDC	3'000 mA			88 %
THM 15-2412WI		12 VDC	1'250 mA			89 %
THM 15-2413WI		15 VDC	1'000 mA			89 %
THM 15-2415WI		24 VDC	625 mA			88 %
THM 15-2421WI		+5 VDC	1'500 mA	-5 VDC	1'500 mA	86 %
THM 15-2422WI		+12 VDC	625 mA	-12 VDC	625 mA	88 %
THM 15-2423WI		+15 VDC	500 mA	-15 VDC	500 mA	89 %
THM 15-4811WI		18 - 75 VDC (48 VDC nom.)	5 VDC	3'000 mA		
THM 15-4812WI	12 VDC		1'250 mA			88 %
THM 15-4813WI	15 VDC		1'000 mA			89 %
THM 15-4815WI	24 VDC		625 mA			89 %
THM 15-4821WI	+5 VDC		1'500 mA	-5 VDC	1'500 mA	86 %
THM 15-4822WI	+12 VDC		625 mA	-12 VDC	625 mA	89 %
THM 15-4823WI	+15 VDC		500 mA	-15 VDC	500 mA	89 %

### Options

<b>on demand</b> (backorder with MOQ non stocking item)	- Optional models with remote-control function - Optional models with remote-control function with inverse logic
---	---

### Input Specifications

Input Current	- At no load	24 Vin models: <b>10 mA typ.</b> 48 Vin models: <b>9 mA typ.</b>
Surge Voltage		24 Vin models: <b>50 VDC max.</b> (3 s max.) 48 Vin models: <b>100 VDC max.</b> (3 s max.)
Under Voltage Lockout		24 Vin models: <b>7.8 VDC min. / 8 VDC typ. / 8.6 VDC max.</b> 48 Vin models: <b>15.8 VDC min. / 16 VDC typ. / 17.4 VDC max.</b>
Recommended Input Fuse		24 Vin models: <b>3'150 mA</b> (slow blow) 48 Vin models: <b>1'600 mA</b> (slow blow)
Input Filter		<b>Internal Pi-Type</b>

### Output Specifications

Output Voltage Adjustment		-10% to +20% (By external trim resistor) (15 & 24 VDC single output models) ±10% (By external trim resistor) (other single output models) See application note: <a href="http://www.tracopower.com/overview/thm15wi">www.tracopower.com/overview/thm15wi</a> Output power must not exceed rated power!
Voltage Set Accuracy		<b>±1% max.</b>
Regulation	- Input Variation (Vmin - Vmax)	single output models: <b>0.2% max.</b> dual output models: <b>0.5% max.</b>
	- Load Variation (0 - 100%)	single output models: <b>0.2% max.</b> dual output models: <b>1% max.</b> (Output 1) <b>1% max.</b> (Output 2)
	- Cross Regulation (25% / 100% asym. load)	dual output models: <b>5% max.</b>
Ripple and Noise (20 MHz Bandwidth)	- single output	5 Vout models: <b>50 mVp-p typ.</b> (with 10 µF X7R) 12 Vout models: <b>75 mVp-p typ.</b> (with 10 µF X7R) 15 Vout models: <b>75 mVp-p typ.</b> (with 10 µF X7R) 24 Vout models: <b>100 mVp-p typ.</b> (with 4.7 µF X7R)
	- dual output	5 / -5 Vout models: <b>50 / 50 mVp-p typ.</b> (with 10 µF X7R) 12 / -12 Vout models: <b>75 / 75 mVp-p typ.</b> (with 10 µF X7R) 15 / -15 Vout models: <b>75 / 75 mVp-p typ.</b> (with 10 µF X7R)
Capacitive Load	- single output	5 Vout models: <b>3'800 µF max.</b> 12 Vout models: <b>650 µF max.</b> 15 Vout models: <b>530 µF max.</b> 24 Vout models: <b>190 µF max.</b>
	- dual output	5 / -5 Vout models: <b>1'900 / 1'900 µF max.</b> 12 / -12 Vout models: <b>380 / 380 µF max.</b> 15 / -15 Vout models: <b>270 / 270 µF max.</b>
Minimum Load		<b>Not required</b>
Temperature Coefficient		<b>±0.02 %/K max.</b>
Start-up Time		<b>30 ms typ. / 60 ms max.</b>
Short Circuit Protection		<b>Continuous, Automatic recovery</b>
Output Current Limitation		<b>185% max. of Iout max.</b> <b>150% typ. of Iout max.</b>
Overvoltage Protection		<b>125% typ. of Vout nom.</b> (depending on model) <b>6.2 VDC typ.</b> (5 VDC model) <b>15 VDC typ.</b> (12 VDC model) <b>20 VDC typ.</b> (15 VDC model) <b>30 VDC typ.</b> (24 VDC model) <b>6.2 VDC typ.</b> (±5 VDC model) <b>15 VDC typ.</b> (±12 VDC model) <b>20 VDC typ.</b> (±15 VDC model)
Transient Response	- Response Time	<b>250 µs typ.</b> (25% Load Step)

All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.

### Safety Specifications

Safety Standards	- IT / Multimedia Equipment	EN 62368-1 IEC 62368-1 UL 62368-1
	- Medical Equipment	EN 60601-1 IEC 60601-1 ANSI/AAMI ES 60601-1 2 x MOPP (Means Of Patient Protection)
	- Certification Documents	<a href="http://www.tracopower.com/overview/thm15wi">www.tracopower.com/overview/thm15wi</a>
Pollution Degree		PD 2
Over Voltage Category		OVC II

### EMC Specifications

EMI Emissions	- Conducted Emissions	EN 60601-1-2 edition 4 (Medical Devices) EN 55011 class A (internal filter) EN 55011 class B (with external filter) EN 55032 class A (internal filter) EN 55032 class B (with external filter) FCC Part 18, class A FCC Part 18, class B
	- Radiated Emissions	EN 55011 class A (internal filter) EN 55011 class B (with external filter) EN 55032 class A (internal filter) EN 55032 class B (with external filter) FCC Part 18, class A FCC Part 18, class B
		External filter proposal: <a href="http://www.tracopower.com/overview/thm15wi">www.tracopower.com/overview/thm15wi</a>
EMS Immunity	- Electrostatic Discharge	EN 60601-1-2 edition 4 (Medical Devices) Air: EN 61000-4-2, $\pm 15$ kV, perf. criteria A Contact: EN 61000-4-2, $\pm 8$ kV, perf. criteria A
	- RF Electromagnetic Field	EN 61000-4-3, 10 V/m, perf. criteria A
	- EFT (Burst) / Surge	EN 61000-4-4, $\pm 2$ kV, perf. criteria A EN 61000-4-5, $\pm 2$ kV, perf. criteria A
		Ext. input component: 24 Vin models: 2 x KY 220 $\mu$ F // TVS SMDJ58A 48 Vin models: 2 x KY 220 $\mu$ F // TVS SMDJ120A
	- Conducted RF Disturbances	EN 61000-4-6, 10 Vrms, perf. criteria A
	- PF Magnetic Field	Continuous: EN 61000-4-8, 100 A/m, perf. criteria A 1 s: EN 61000-4-8, 1000 A/m, perf. criteria A

### General Specifications

Relative Humidity		95% max. (non condensing)
Temperature Ranges	- Operating Temperature	-40°C to +85°C
	- Case Temperature	+105°C max.
	- Storage Temperature	-55°C to +125°C
Power Derating	- High Temperature	2.5 %/K above 65°C
Over Temperature	- Protection Mode	115°C typ. (Automatic recovery)
Protection Switch Off	- Measurement Point	Case
Cooling System		Natural convection (20 LFM)
Remote Control	- Voltage Controlled Remote	On: 3.5 to 12 VDC or open circuit Off: 0 to 1.2 VDC or short circuit Refers to 'Remote' and '-Vin' Pin
	- Off Idle Input Current	2.5 mA typ.
	- Remote Pin Input Current	-0.5 to 1.0 mA (Only for optional models with remote-control. Inverse models available.)
Altitude During Operation		5'000 m max.

All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.


Switching Frequency		225 - 285 kHz (PWM) 250 kHz typ. (PWM)
Insulation System		Reinforced Insulation
Isolation Test Voltage	- Input to Output, 60 s	5'000 VAC
Creepage	- Input to Output	8 mm min.
Clearance	- Input to Output	8 mm min.
Isolation Capacitance	- Input to Output, 100 kHz, 1 V	20 pF typ.
Leakage Current	- Touch Current	2.5 $\mu$ A max. (240 VAC, 60 Hz)
Reliability	- Calculated MTBF	2'080'000 h (MIL-HDBK-217F, ground benign)
Environment	- Vibration - Thermal Shock	MIL-STD-810F MIL-STD-810F
Housing Material		Non-conductive Plastic (UL94 V-0 rated)
Base Material		Non-conductive Plastic (UL 94 V-0 rated)
Potting Material		Silicone (UL 94 V-0 rated)
Soldering Profile		265°C / 10 s max.
Connection Type		THD (Through-Hole Device)
Weight		24 g
Thermal Impedance		15.3 K/W
Environmental Compliance	- Reach - RoHS	<a href="http://www.tracopower.com/info/reach-declaration.pdf">www.tracopower.com/info/reach-declaration.pdf</a> <a href="http://www.tracopower.com/info/rohs-declaration.pdf">www.tracopower.com/info/rohs-declaration.pdf</a>

### Supporting Documents

Overview Link (for additional Documents)

[www.tracopower.com/overview/thm15wi](http://www.tracopower.com/overview/thm15wi)

### Outline Dimensions

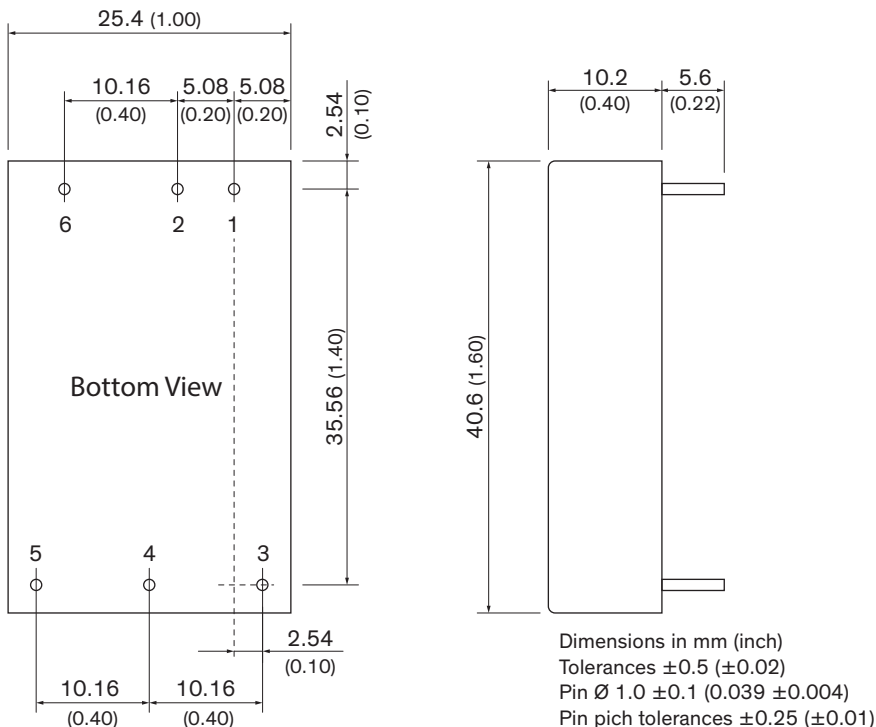

### Pinout

Pin	Single Output	Dual Output
1	+Vin (Vcc)	+Vin (Vcc)
2	-Vin (GND)	-Vin (GND)
3	+Vout	+Vout
4	-Vout	Common
5	Trim	-Vout
6	No pin*/Remote	No pin*/Remote

\*If remote is not selected there will be no pin.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## TRACO Power:

[THM 15-4812WI](#) [THM 15-4810WI](#) [THM 15-4822WI](#) [THM 15-2413WI](#) [THM 15-4813WI](#) [THM 15-4823WI](#) [THM 15-2415WI](#) [THM 15-2423WI](#) [THM 15-4815WI](#) [THM 15-2422WI](#) [THM 15-2412WI](#) [THM 15-2410WI](#) [THM 15-2411WI](#)  
[THM 15-4821WI](#) [THM 15-2421WI](#) [THM 15-4811WI](#)