

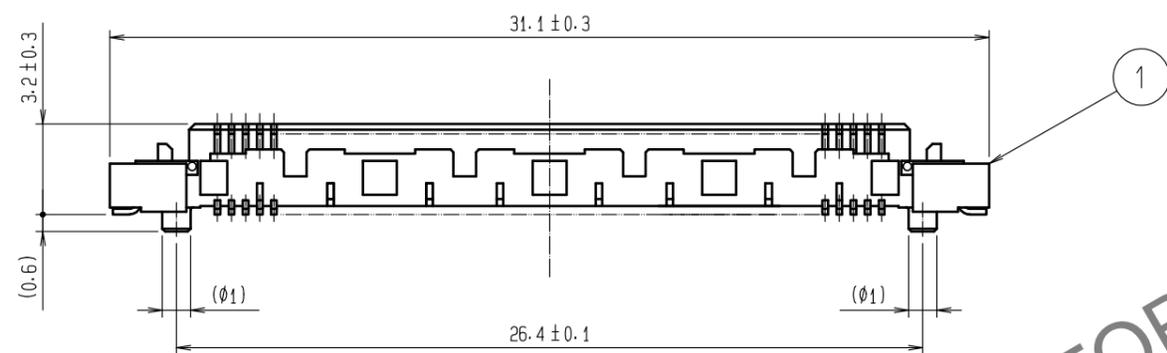



Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

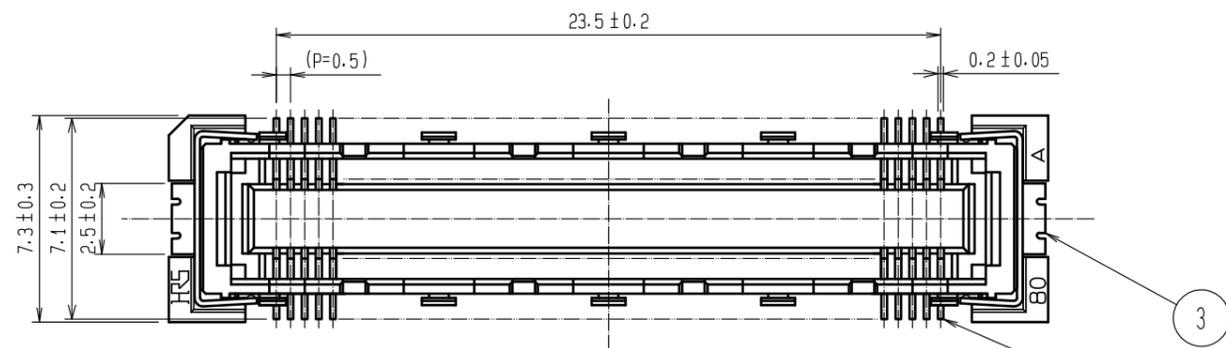

Recommended land pattern dimension of PCB

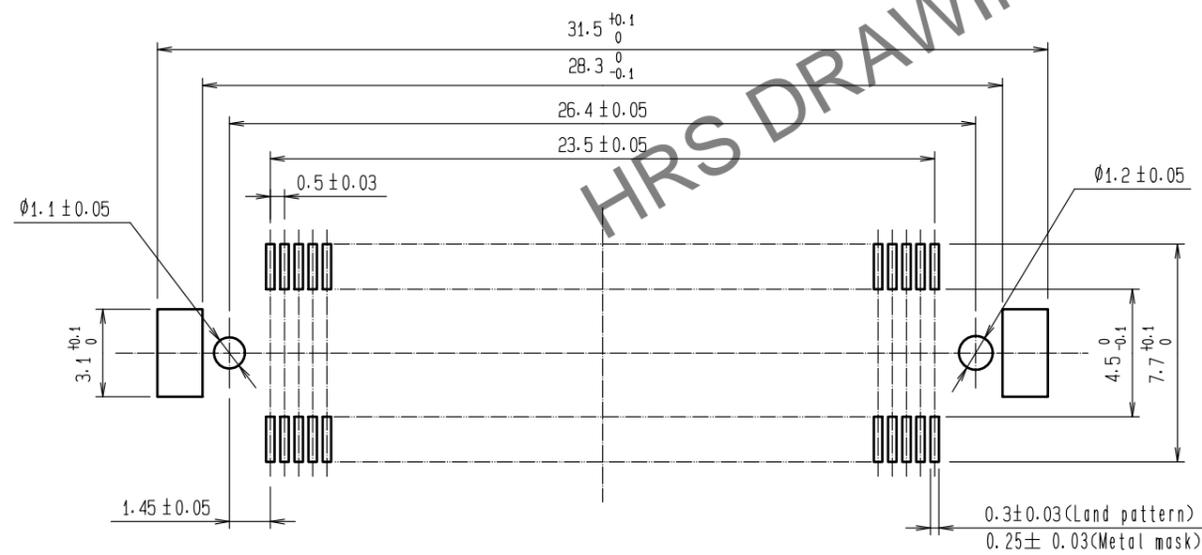


- Notes
- 1 SMT lead - coplanarity : 0.1 max.
 - 2 This product has no polarity to pattern for mounting.
 - 3 Emboss carrier tape package is applied on this product. Please refer to the sheet 2/2 for the details.





2	Phosphor blonze	Contact area : Gold 0.1µm min Lead : Gold 0.05µm min Under plating : Nickel 1µm min	5	Polyester Polyethylene	(Top cover tape) (Emboss carrier tape)		
1	LCP	Beige UL94V-0	4	Phosphor blonze	Tin - plating		
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS		
UNITS mm		SCALE 4 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-F-00011032	DESIGNED MT. ITANO	CHECKED HT. YAMAGUCHI	DATE 20211007
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : KJ. KATAYOSE	20050105	DRAWING NO.	EDC3-151984-01		
		CHECKED : HS. OKAWA	20050105	PART NO.	FX10A-96S-SV(21)		
		DESIGNED : KT. DOI	20050105	CODE NO.	CL0570-0241-9-21		
		DRAWN : KT. DOI	20050105		1/2		

Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



Drawing for packing (2:1)

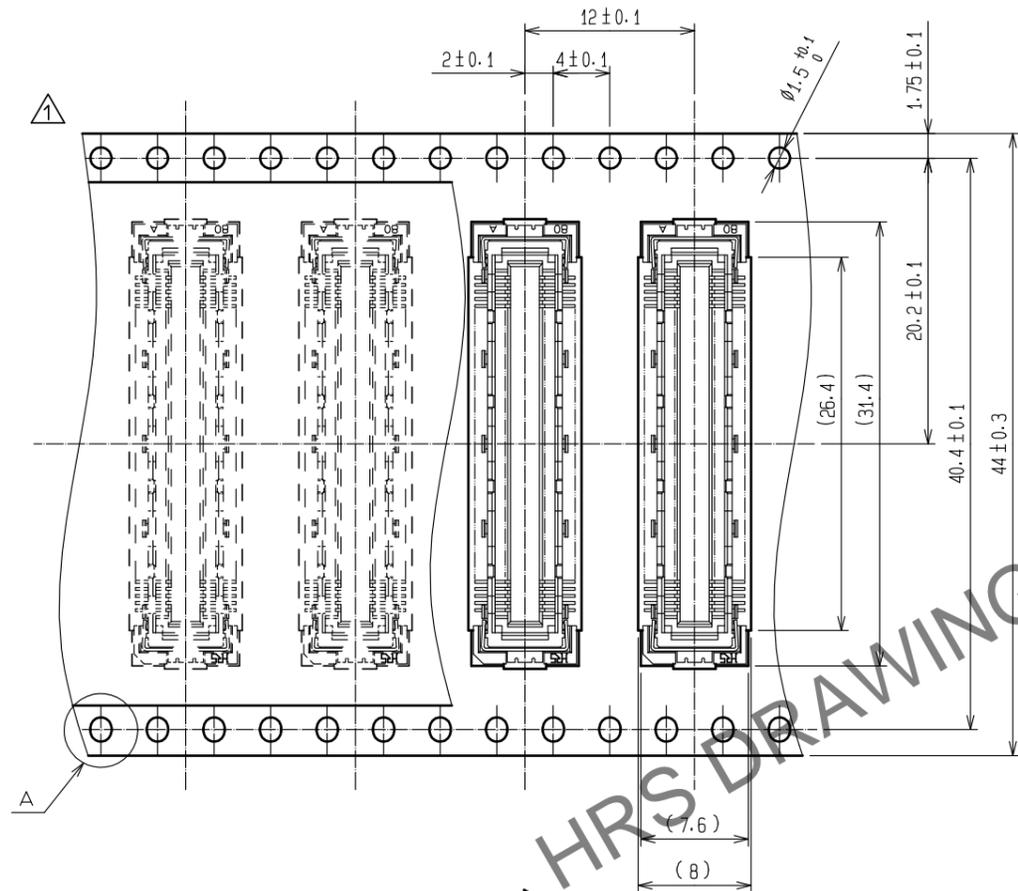



The direction of pulling out



A (5:1)

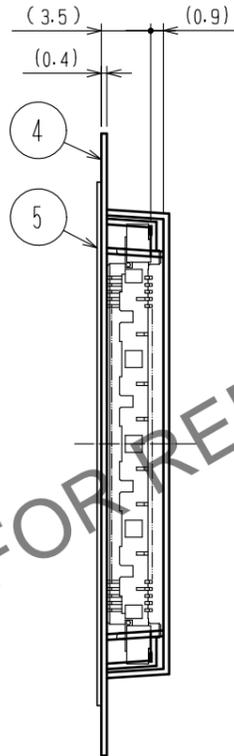

Reeled dimension (Free)

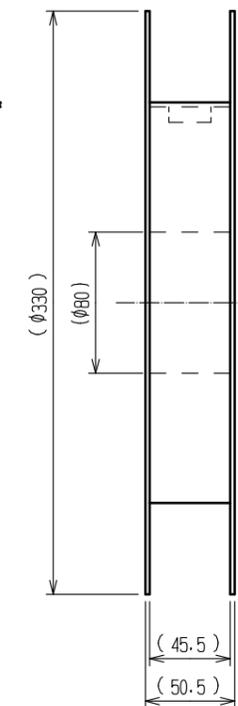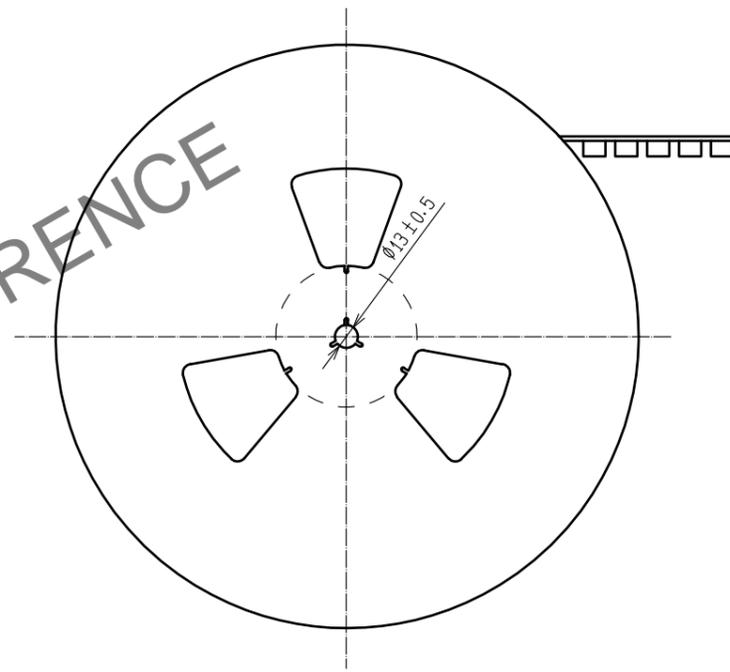

- Notes
- 4 1 reel : 1,000 connectors.
 - 5 Minimum 10 compartments from both reel ends remain empty.
 - 6 This product has no polavity to tape and reel packaging.
 - 7 The dimensions in parentheses are for reference.

HRS	DRAWING NO.	EDC3-151984-01
	PART NO.	FX10A-96S-SV(21)
	CODE NO.	CL0570-0241-9-21
		△ 2/2