


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

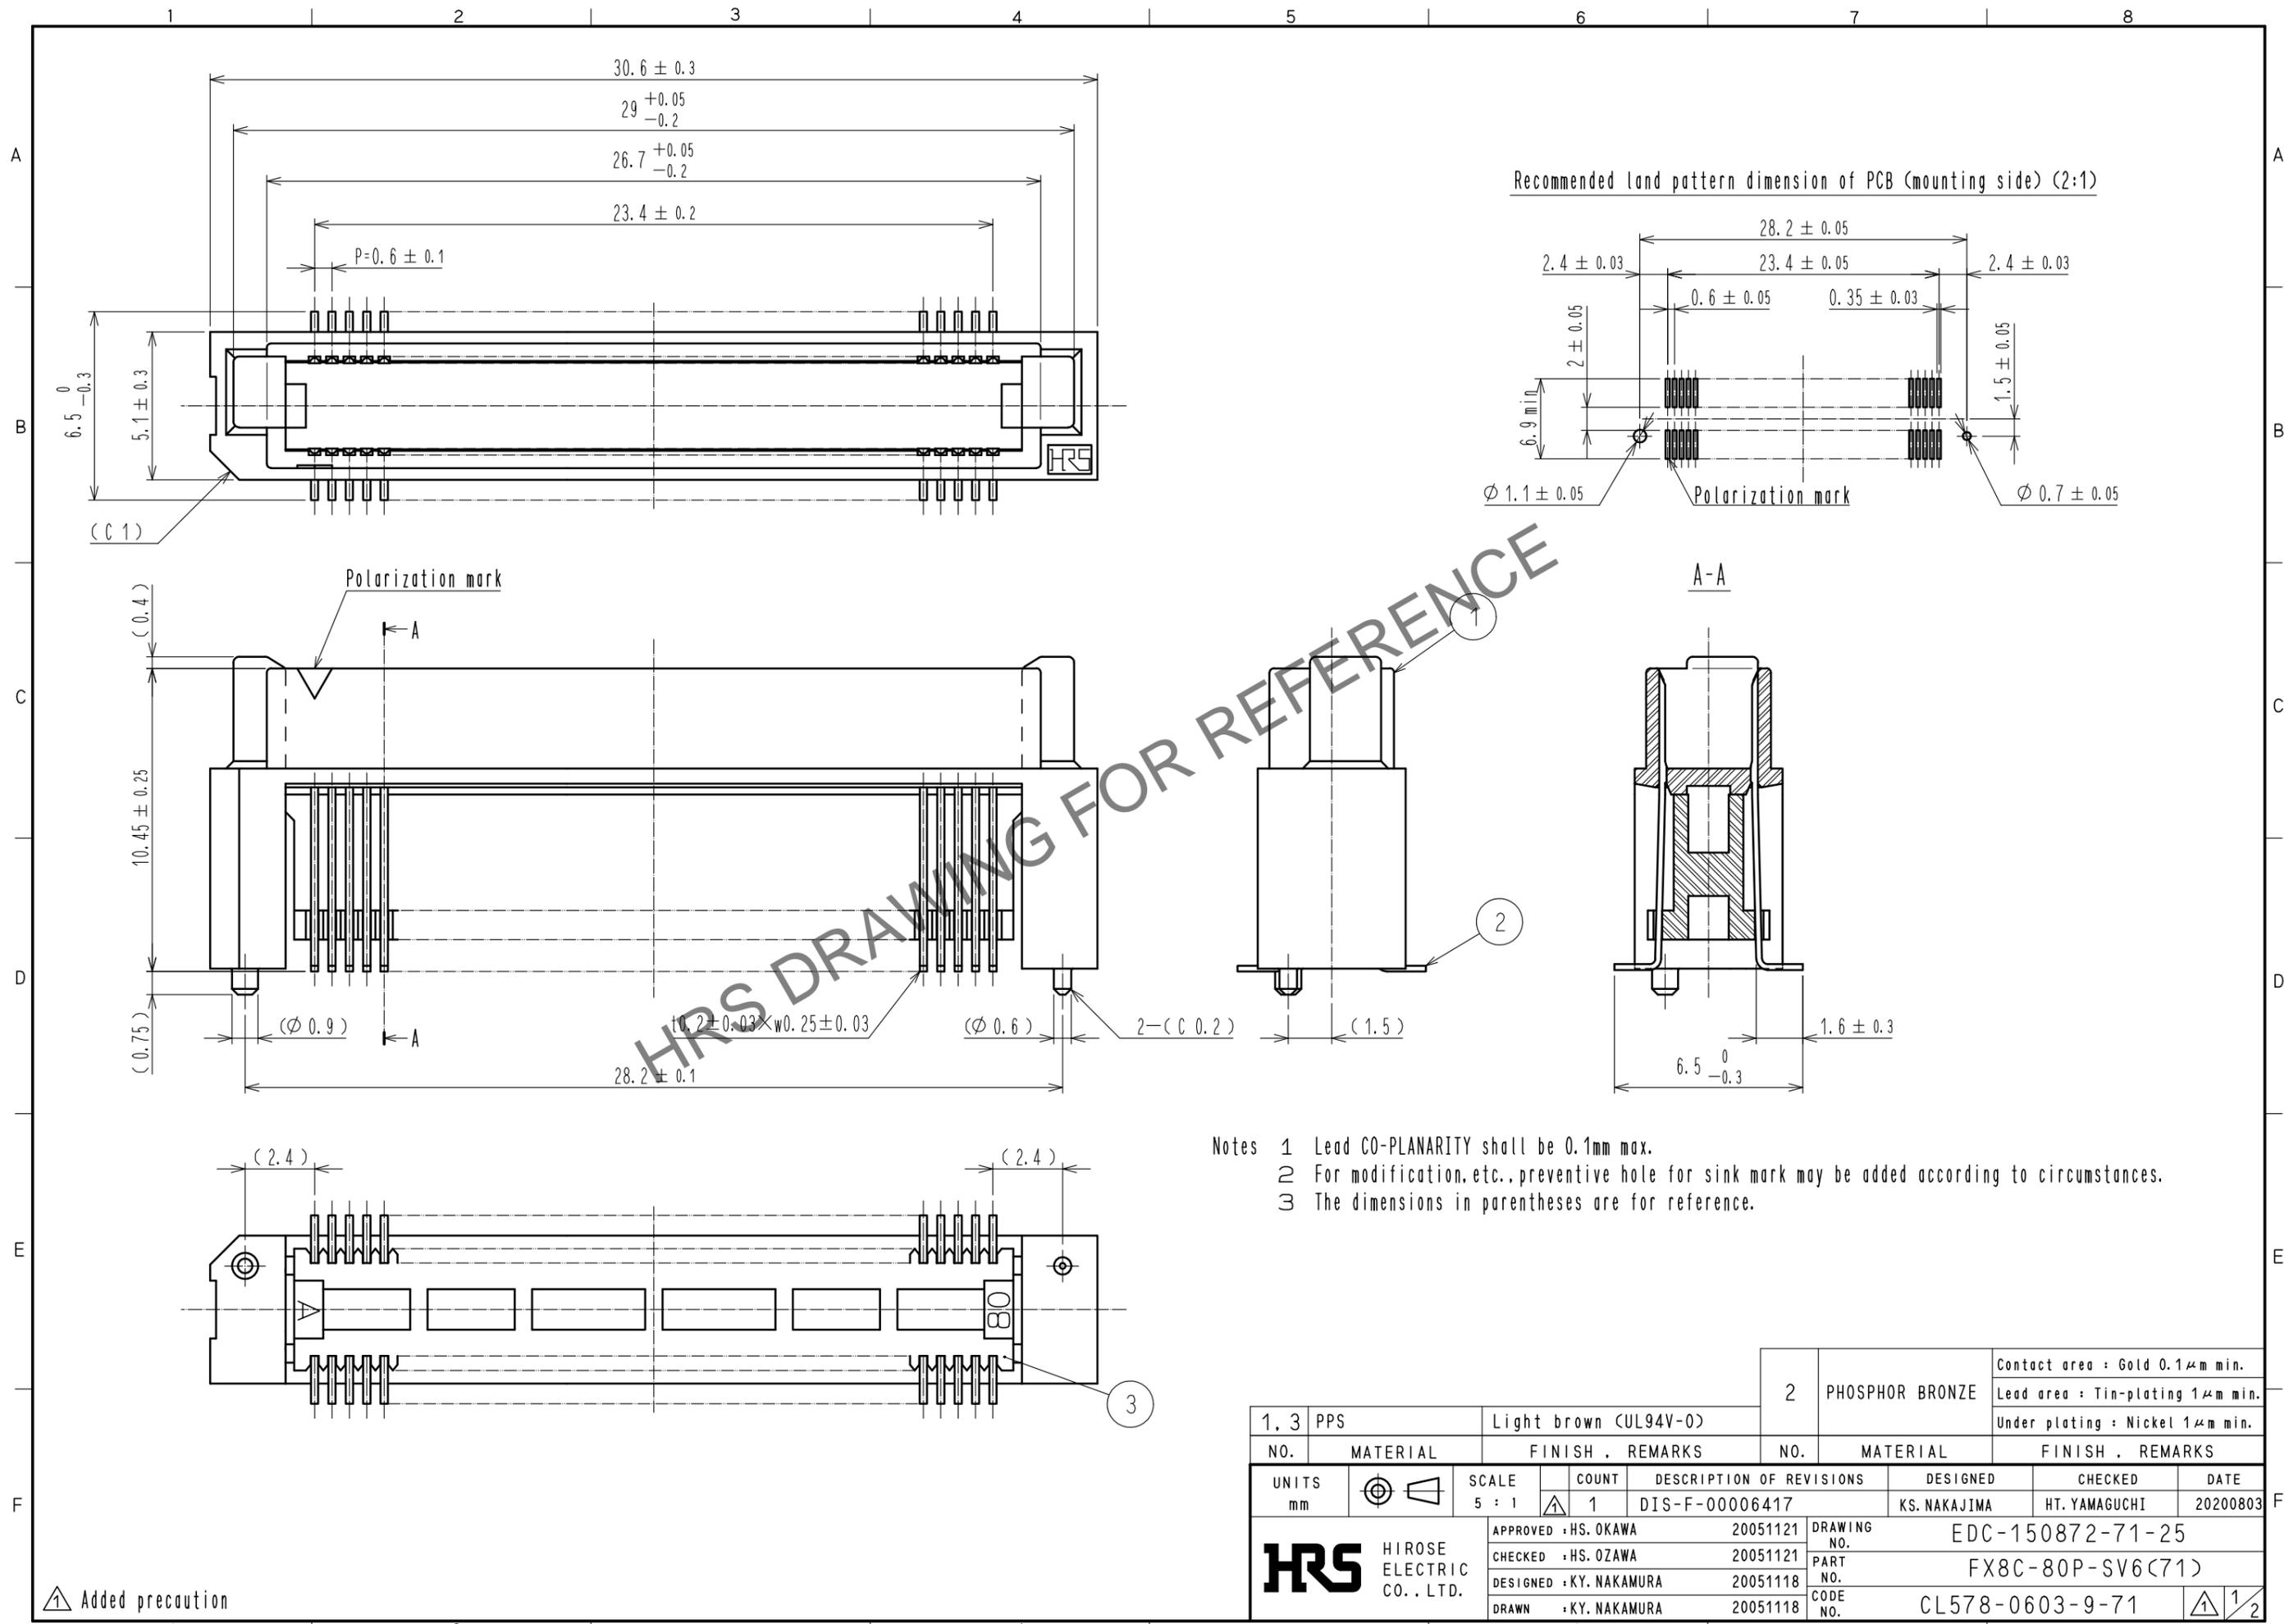

- Notes
- 1 Lead CO-PLANARITY shall be 0.1mm max.
 - 2 For modification, etc., preventive hole for sink mark may be added according to circumstances.
 - 3 The dimensions in parentheses are for reference.

1, 3	PPS	Light brown (UL94V-0)	2	PHOSPHOR BRONZE	Contact area : Gold 0.1μm min. Lead area : Tin-plating 1μm min. Under plating : Nickel 1μm min.
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 5 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-F-00006417	DESIGNED KS. NAKAJIMA
APPROVED : HS. OKAWA		20051121		DRAWING NO. EDC-150872-71-25	
CHECKED : HS. OZAWA		20051121		PART NO. FX8C-80P-SV6(71)	
DESIGNED : KY. NAKAMURA		20051118		CODE NO. CL578-0603-9-71	
DRAWN : KY. NAKAMURA		20051118		1/2	

Added precaution



In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

【 Precaution 】

When a board with multiple connectors mounted is mated, the connector may be damaged or deformed.
Please divide one side of the board so only one connector is mated per board.

OK

NG

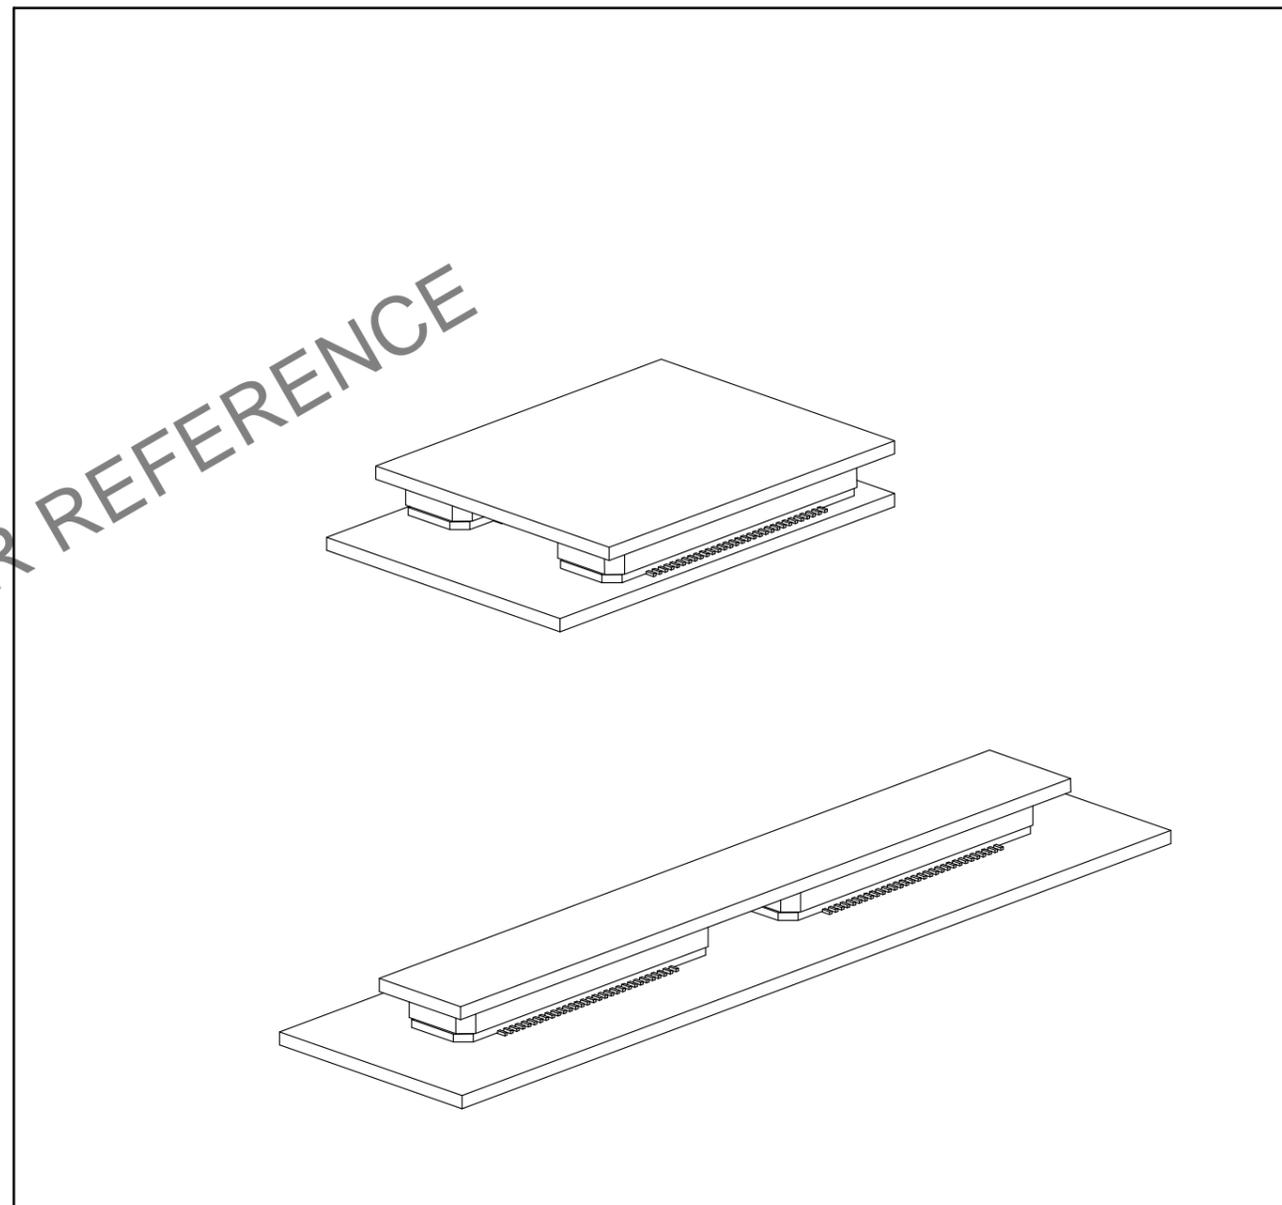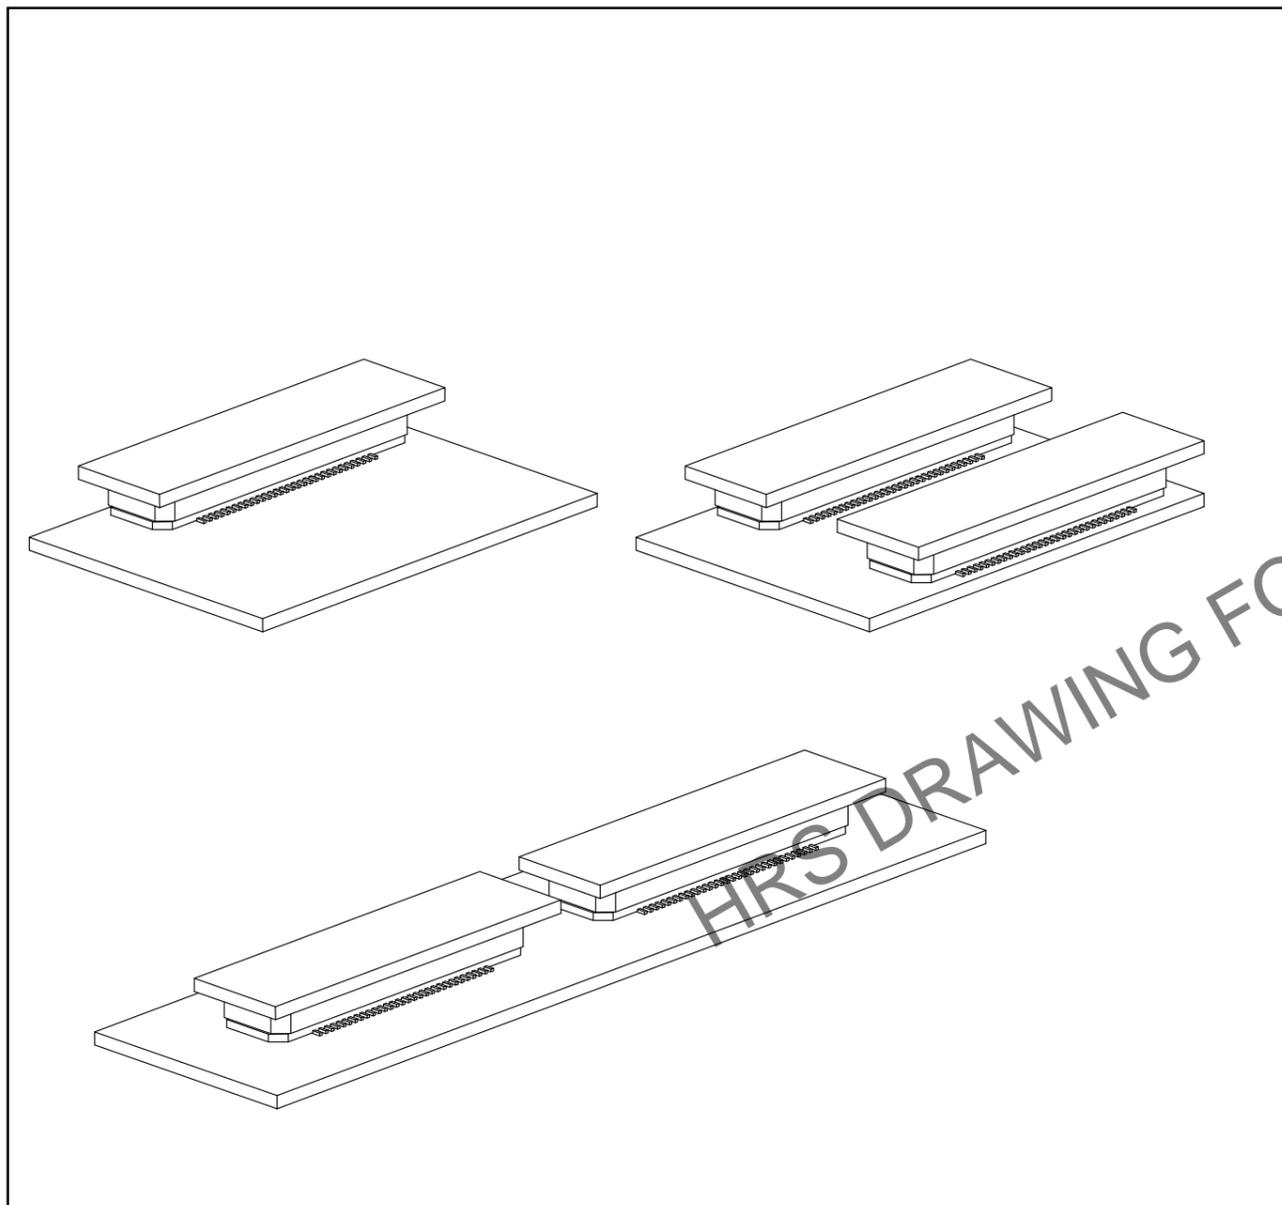

HRS DRAWING FOR REFERENCE

HRS	DRAWING NO.	EDC-150872-71-25		2/2
	PART NO.	FX8C-80P-SV6(71)		
	CODE NO.	CL578-0603-9-71		